


EMVA 1288 Summary Sheet

This datasheet describes the specification according to the standard 1288 for “Characterization and Presentation of Specification Data for Image Sensors and Cameras of the European Machine Vision Association (EMVA)” (see www.standard1288.org or the *Zenodo EMVA 1288 community*) release 3.0 with proprietary extensions from AEON. The measurements were performed with the AEON ACC3 RGB Release 3, 15.08.2015, SN 0001(Baumer), recalibrated 26.08.2019 . The performance parameters and estimated accuracy of the measurements are described in the technical report for the instrument, its calibration in the corresponding specification and calibration report.

Measurements performed by Technical and Application Support Center, Baumer Optronic GmbH.



Vendor	Baumer
Model	VCXG-125M.R
Serial number	700004873869
Sensor diagonal	9.25 mm
Lens category	C-Mount
Resolution	4000 × 3000, 12 bit
Pixel size	1.85 μm × 1.85 μm
Sensor	Sony IMX226
Sensor type	CMOS
Shutter type	Rolling shutter
Overlap capabilities	Overlapped
Maximum frame rate	0.0 Hz
Interface type	GEV

Type of data presented	Single
Operation point 1	
Wavelength centroid	535.7 nm
Wavelength FWHM	31.9 nm
Gain / BlackLevel	1.0 / 43.0
Optional data measured	
None	

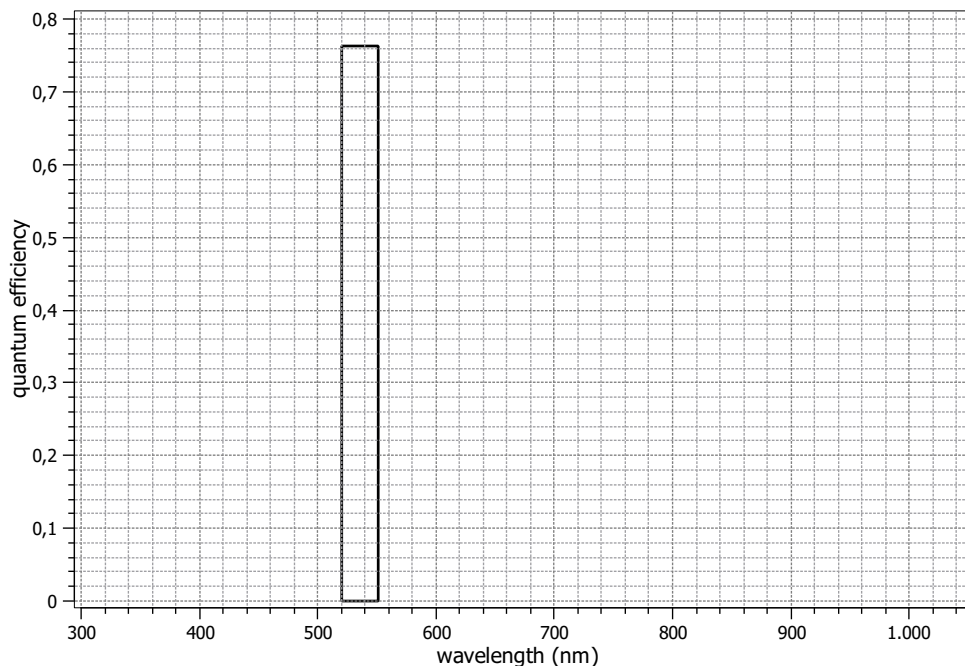

EMVA 1288 Summary Sheet for Operating Point 1

Type of data	Single	Gain / BlackLevel	1.0 / 43.0
Exposure control	By irradiance	Environmental temperature	26.1°C
Exposure time	3.20 ms	Camera body temperature	32.8°C
Frame rate	9.6 Hz	Internal temperature(s)	—
Data transfer mode	Mono12	Wavelength, centr., FWHM	536 nm, 31.9 nm

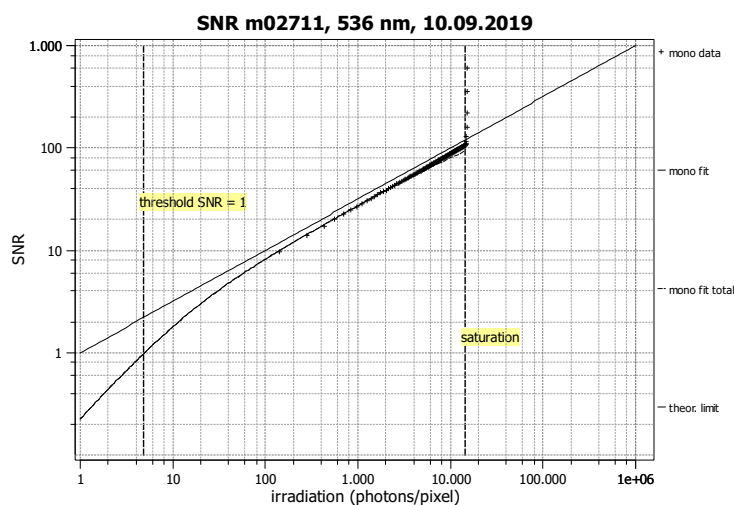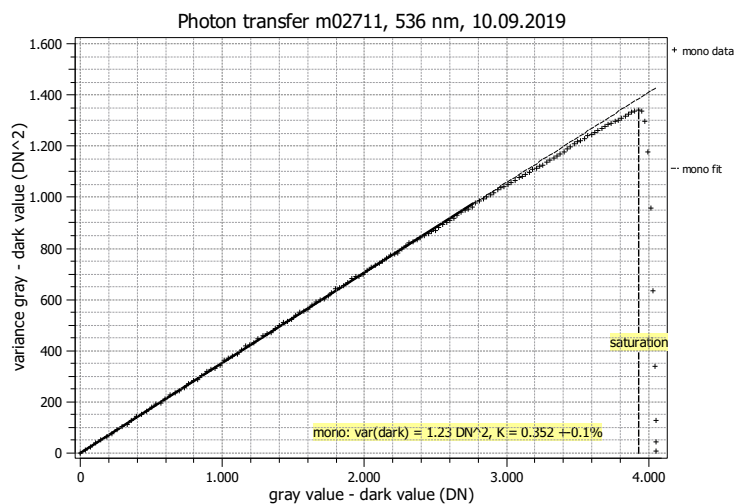

Quantum efficiency

η 76.3%

Overall system gain

K 0.352 DN/e⁻

1/ K 2.837 e⁻/DN

Temporal dark noise & DSNU

$\sigma_{y,\text{dark}}$ 1.11 DN

DSNU₁₂₈₈ 0.10 DN

σ_d 3.03 e⁻

DSNU₁₂₈₈ 0.29 e⁻

Signal-to-noise ratio & PRNU

SNR_{max} 105

40.5 dB

6.7 bit

1/SNR_{max} 0.95 %

PRNU₁₂₈₈ 0.50 %

Nonlinearity

LE 0.15%

LE_{min} -0.08%

LE_{max} 0.21%

Sensitivity & saturation

$\mu_{p,\text{min}}$ 4.83 p

1.411 p/ μm^2

$\mu_{p,\text{sat}}$ 14546 p

4250 p/ μm^2

$\mu_{e,\text{min}}$ 3.68 e⁻

1.076 e⁻/ μm^2

$\mu_{e,\text{sat}}$ 11095 e⁻

3242 e⁻/ μm^2

Dynamic range

DR 3013

69.6 dB

11.6 bit

Dark current

$\mu_{c,\text{mean}}$ 0.2 DN/s

$\mu_{c,\text{mean}}$ 0.5 e⁻/s

$\mu_{c,\text{var}}$ 0.3 e⁻/s